

NATURAL GAS GENERATOR

** Customer Check List**

Customer's gas line should be run 18" to the right of marker and 18" from ground level.

Customer should install a gas shut off valve for generator.


No plastic pipe. (PVC)

Pipe sizing (check with certified plumber).

Notify South Coast Gas 2-3 days in advance for meter connection.

Adult must be present for meter connection.

Established customers may be required to upgrade current meter setup to accommodate volume required to operate appliances.

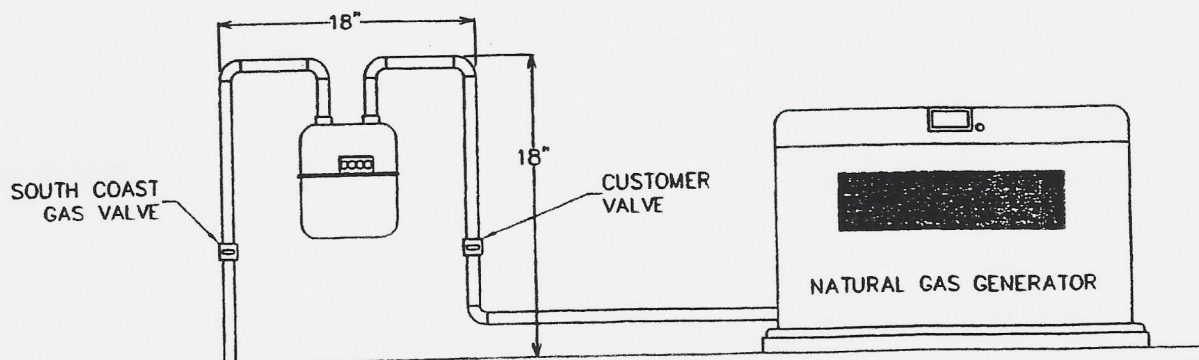

South Coast Gas Company
(985) 537-5281
www.SouthCoastGasCo.com